



## NEXT STEP™ Walk Soft

### Key Selling Feature:

- Underfoot comfort

### Product Overview:

Created with our unique lamination technology, Dinoflex NEXT STEP™ Walk Soft recycled rubber flooring has been specifically designed to enable long periods of standing in one place without discomfort or pain. Walk Soft's high density colored top layer is combined with a soft, force reducing backing which makes it durable enough to withstand wear from items such as chairs and high-heel shoes. Manufactured with the same high quality standard found in all Dinoflex products, Walk Soft flooring eliminates the need for additional anti-fatigue mats at work stations.


### Features:

- Superior durability
- Improved underfoot comfort
- Large color selection
- High traction
- Stain resistant
- Sound reducing

### Best Applications:

Locations where prolonged standing causes fatigue for staff and customers, such as:

- Commercial retail
- Pharmacies
- Commercial banking industry
- Hospitality
- Laboratory workstations - Nursing, Spa, Dental, Physiotherapy

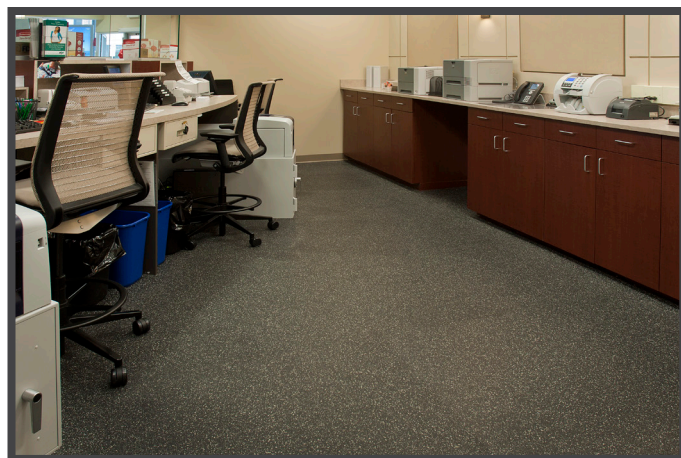

## Why choose NEXT STEP™ Walk Soft over standard Evolution Tile in these applications?

- The high density Dinoflex product is now combined with a softer, more comfortable backing for improved ergonomic benefits.

## When is NEXT STEP™ Walk Soft the right product to offer?

- When durability and underfoot comfort are key customer requirements.
- When a quick and simple, no glue installation is needed for retail locations (interlocking).
- In locations where staff with high-heel shoes need anti-fatigue flooring.
- For retail locations that use rolling carts, full glue-down Walk Soft is suitable.

## Size and Thickness:

- 37" x 37" interlocking (no glue) and 38" x 38" square (glue down)
- 10mm – 3/8" (4mm top surface with 6mm recycled black backing)
- 8mm – 5/16" (4mm top surface with 4mm recycled black backing)

## Colors:

Please reference Color Guide for complete selection

- Sport Mat colors – 50% color; Stone Line, Elite Line
- Evolution – Full line of 70 standard colors

## Warranty:

- 5-year good workmanship

## NEXT STEP™ Walk Soft Technical Data

| TEST             | DESCRIPTION  | OVER 50% Color   |
|------------------|--|--|
| ASTM C501        | Taber Abrasion (H-22)<br>1000 cycles                     | 0.1g wt. Loss  |
| ASTM D2047       | Static Coefficient of Friction (James<br>Machine Method) | Dry 0.85, Wet 1.01   |
| ASTM D2240       | Hardness Shore A Durometer                               | 64 Indentation   |
| ASTM D3574       | Anti Fatigue Compression Deflection<br>Comparison        | 0.029" to 0.041" deflection - at 20 lbs/sq. in<br>0.043" to 0.054" deflection - at 40 lbs/sq. in |
| ASTM D3676       | Density Foam Test  | 78.3 lbs/cu. ft.   |
| ASTM D412        | Tensile Strength   | 192.6 lbs/sq. in.  |
| ASTM F970-87     | Static Load (1000 lbs)                                   | .042 inch (10.6%)<br>Residual Compression  |
| ASTM F925        | Chemical Resistance                                      | No Change  |
| ASTM G21         | Mildew Resistance  | No Mildew After 28 Days  |
| CALIFORNIA 01350 | Indoor Air Quality                                       | Passed   |