



PlayTiles[®]


by dinoflex

Let **Kids** be **Kids**

SCHOOLS ■ PARKS ■ PLAYGROUNDS ■ DAYCARES



RECYCLED
RUBBER
FLOORING



Dinoflex PlayTiles® creates a safe place to let kids be kids. Parents will have peace of mind knowing their kids are playing on an ASTM certified surface. Specially designed to reduce injuries from falls, kids can run, jump, swing, and slide on a product that supports play.

Water
Permeable
and Slip
Resistant.

Tough enough to stand up to any weather condition and the most active children, PlayTiles® allow your kids to play on a dry surface after a rainstorm, getting them back outside quickly.

Features

- Fall height certified
- High traction
- Water permeable
- Molded tile creates solid surface
- Easy to install
- Long lasting
- Meets ADA standards

Benefits

- Reduces injuries from falls
- Slip resistant even when wet
- Porous in nature, allows water to flow through
- No adhesive required for most applications
- Tiles can be installed in any season
- Withstands any wear and tear
- Creates an inclusive play space for all

Best For

Climbing Walls

Community Centers

Daycares

Indoor Play Areas

Recreation Centers

Schools



Interlocking Tile

24" x 24" | 4ft²

(61cm x 61cm = 0.37m²)


| THICKNESS | FALL HEIGHT | With 1 1/4" Dinofall System | With 2 1/4" Dinofall System |
|---------------|-------------|-----------------------------|-----------------------------|
| 1 1/2" (38mm) | 4' (1.2m) | 7' 6" | 11' 6" |
| 2 1/4" (57mm) | 6' (1.8m) | 9' | 12' |

Interlocking System

Dinoflex self-aligning interlocking system provides for a fast and accurate installation. Interlocking tubes are included with every order for a nominal cost.



Interlock Tube



Interlocking Panels



Tile Back

Accessories

Ramps and Wedges



1.5" Wedge



2.25" Wedge



Inside Corner



Outside Corner



1.5" ADA Wheelchair Ramp




2.25" Wheelchair Ramp
(Sold as a set)

Dinofall System

Increase fall height protection by using our Dinofall System made from 100%, recycled, non-contaminated, post industrial cross-linked closed cell polyethylene.

Dinofall Dimensions

| THICKNESS | SHEET | |
|---------------------|---------------------|----------------------|
| 1 ¼" and 2 ¼" | 39 1/16" x 90 9/16" | Tolerance +/- 1/16" |
| 31.75mm and 57.15mm | 99.21cm x 230.02mm | Tolerance +/- 0.06mm |

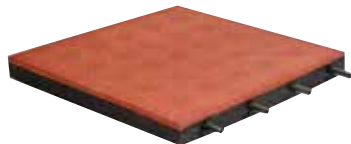

Tile



Dinofall



Tile and Dinofall

Color Swatches



BLUE EMBER



FOREST GREEN




STONE BEIGE



TEAK BROWN




TERRA COTTA
RED




BLACK

EPDM Variations



25% BLUE




25% GREEN




25% BEIGE




25% BROWN




25% RED



25% ORANGE



50% BLUE



50% GREEN




50% BEIGE




50% BROWN



50% RED



50% ORANGE



75% BLUE



75% GREEN




75% BEIGE



75% BROWN



75% RED



75% ORANGE

Contact your Sales Representative for more information.
Colors shown are reproduced as closely as possible to actual product.
Contact Dinoflex for product sample.



Click here to design your own
Recycled Rubber Tile.



| DESCRIPTION | TEST METHOD | RESULT |
|---|----------------|--|
| Freeze Thaw | ASTM C67 | No Change |
| Slip Coefficient | ASTM C1028 | Dry: 0.81 Wet: 0.73 |
| Rubber Deterioration in an Air Oven | ASTM D573 | No change |
| Critical Radiant Flux | ASTM E648 | CRF 0.10 watts/square cm (2¼" - Black) |
| Critical Radiant Flux - With Fire Retardant | ASTM E648 | CRF 1.04 watts/square cm (1½" Black 100% Fire Retardant) CRF 0.84 watts/square cm (1½" Black 60% Fire Retardant) CRF 0.99 watts/square cm (1½" Black with Fire Retardant top) CRF 0.95 watts/square cm (2¼" Black with Fire Retardant) |
| Critical Radiant Flux - With Fire Retardant (15 min burn) | ASTM E648 (NY) | CRF 1.04 watts/square cm (1½" Black 100% Fire Retardant) CRF 1.04 watts/square cm (1½" Black 60% Fire Retardant) CRF 0.99 watts/square cm (1½" Black with Fire Retardant top) CRF 0.97 watts/square cm (2¼" Black 100% Fire Retardant whole tile) CRF 0.97 watts/square cm (2¼" Black with Fire Retardant) |
| Fall Height | ASTM F1292 | 1½" - 4 ft 2¼" - 6 ft |
| Fall Height (with 1½" Dinofall system) | ASTM F1292 | 1½" - 7.5 ft 2¼" - 9 ft |
| Fall Height (with 2¼" Dinofall system) | ASTM F1292 | 1½" - 11.5 ft 2¼" - 12 ft |
| Mildew Resistance | ASTM G21 | 21 days - light mold growth 28 days - moderate mold growth |
| Water Drainage | | 4 litres drained in 306.71 seconds (5.1 minutes) |
| Wind Resistance | UL 1897 | Pass |

Please Note: All measurements are subject to nominal variation.

Dinoflex
P.O. Box 3309
5590 46 Ave SE
Salmon Arm, BC, Canada
V1E 4S1

Toll Free: 1-877-713-1899
Direct: 250-832-7780
sales@dinoflex.com
dinoflex.com



CERTIFIED BY
SCS Global Services

10-year limited warranty
when installed in accordance with
Dinoflex's Installation Guidelines.

Date Issued: April 2025