

A background image of a person's legs and feet running on a dark, textured surface, likely a track. The person is wearing blue sneakers and white socks. The image is slightly blurred to convey motion.

# Vulca-NO! EXTREME


by dinoflex

## TOUGH HIGH DENSITY

EDUCATION ■ INDUSTRIAL ■ SPORT/FITNESS ■ SKI RESORTS



RECYCLED  
RUBBER  
FLOORING

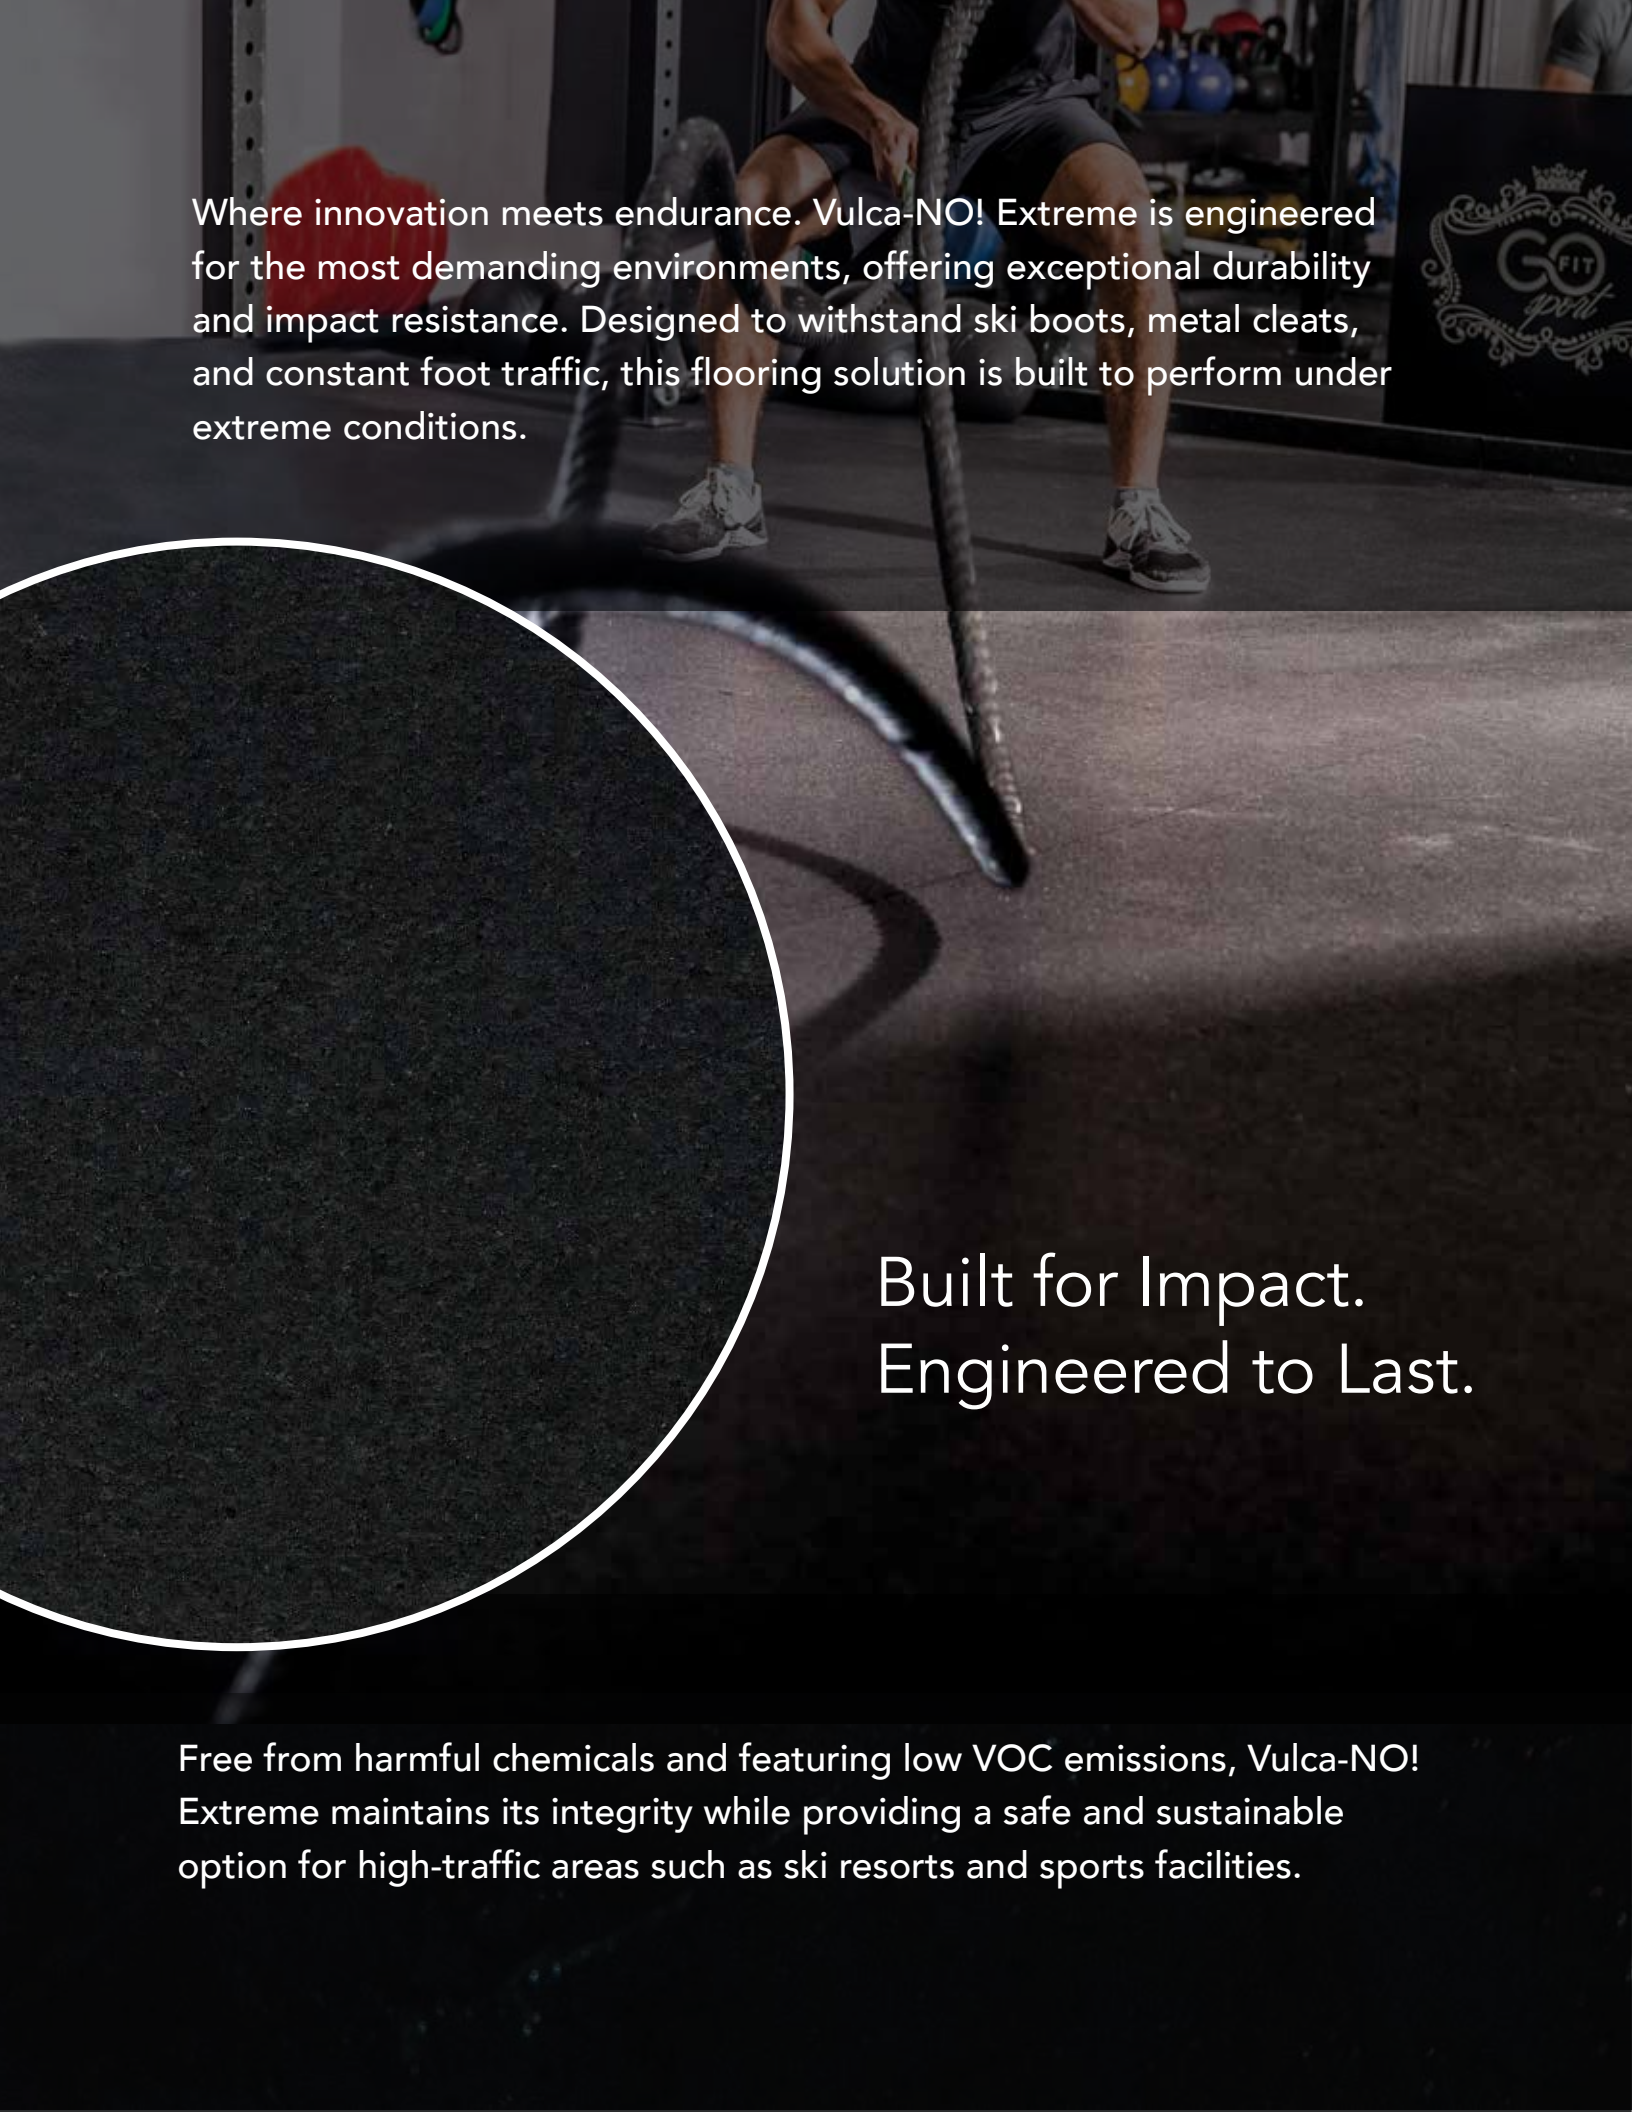

Where innovation meets endurance. Vulca-NO! Extreme is engineered for the most demanding environments, offering exceptional durability and impact resistance. Designed to withstand ski boots, metal cleats, and constant foot traffic, this flooring solution is built to perform under extreme conditions.

Built for Impact.  
Engineered to Last.

Free from harmful chemicals and featuring low VOC emissions, Vulca-NO! Extreme maintains its integrity while providing a safe and sustainable option for high-traffic areas such as ski resorts and sports facilities.



## Features

- Great traction - wet or dry
- Heavy duty dense material
- Impact absorbing
- Sound reducing
- Non-vulcanized
- Easy to clean

## Benefits

- Reduces risk of injuries from slips & falls
- Eliminates the need to replace frequently
- Reduces soreness, fatigue in muscles & joints
- Decreases vibration & noise
- Certified for indoor air quality with no odor
- Low maintenance costs

## Best For

Agriculture

CrossFit Gyms

Dugouts

Fitness Centers

Industrial


Ski Resorts



Tolerance of +/- 0.5mm

## Square Edge

48" x 72" = 24ft<sup>2</sup> (121.92cm x 182.88cm)



## STANDARD THICKNESS

7mm (9/32"), 12mm (1/2"), 15mm (19/32"),  
19mm (25/32")



## Testing Results

DESCRIPTION	TEST METHOD	RESULT
Breaking Load & Elongation	ASTM D412	Breaking load: 115.89 Lbs. Elongation: 137.02% Tensile: 479.9 lbs/sq. inch
Coefficient of Friction: James Machine	ASTM D2047	Dry = 1.12, Wet = 1.05
Taber Abrasion	ASTM D4060	0.20 Grams (0.19%) loss
Flexibility	ASTM F137	Passes - 6mm Mandrel
Static Load Limit	ASTM F970	0.005 Inch @ 250 psi
Dimensional Stability/Curling Properties	ASTM F2199	Length: -0.010" per 12 inches Width: -0.019" per 12 inches
Force Reduction	ASTM F2569	11.3%, Class 1
Force Reduction Ball Rebound Surface Finish Effect Vertical Deflection / Deformation	ASTM F2772	Force Reduction: 11.3% Class 1 Ball Rebound: 98.5% Passes Surface Finish Effect: 104 BPV Passes Vertical Deflection/Deformation: 0.6 mm Class B
Slip Resistance	BM-III British Pendulum Skid Friction Coefficient Tester	Average COF: Dry = 0.83, Wet = 0.38

Please Note: All measurements are subject to nominal variation.

Dinoflex  
P.O. Box 3309  
5590 46 Ave SE  
Salmon Arm, BC, Canada  
V1E 4S1

Toll Free: 1-877-713-1899  
Direct: 250-832-7780  
[sales@dinoflex.com](mailto:sales@dinoflex.com)  
[dinoflex.com](http://dinoflex.com)

**5-year limited warranty**  
when installed in accordance with  
Dinoflex's Installation Guidelines.

Date Issued: April 2025

