

Technical Data Sheet




Product Information

Composition	Construction	Mat Size	Sq. ft / Mat	Edge Finish	Available Thickness	Manufactured
Recycled Rubber	Backings are manufactured in block form	38" x 38"	10.02	Square	6mm, 8mm, 9mm, 10mm, 12mm (both square cut and interlocking)	North America
Polyurethane Binder		37" x 37"	9.5	Interlocking		
Polyurethane	2mm/3mm Wear layer					

Installation

Edge Finish	Installation Type	Layout
Square	DinoGrip adhesive	Ashlar/Brick pattern
Interlocking	Loose lay	Ashlar/Brick pattern

Product

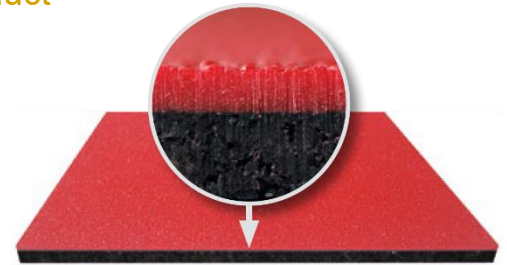

Maintenance

Cleaner	Cleaning	Cleaning Method
DinoClean	Vacuum or sweep	Microfiber mop

Sustainability

Performance	Standard	Requirement	Performance vs. Requirements
TVOC Range	CDPH/EHLB v1.2-2017 (California Section 01350)	<0.5 mg/m ³	Pass
Low-Emitting Adhesives	SCAQMD Rule #1168	Less than 50 g/L	Pass, 37 g/L
Certification Attribute	Standard	3rd party Certification/Certifier	
Low-Emitting Material	CDPH/EHLB v1.2-2017 (California Section 01350)	#SCS-FS-02144	
LEED Scorecard	MR2.2, MR4, MR5, EQ4.1, EQ4.3, ID1.1		
Environmental Product Declaration (EPD)	ISO 14025:2006 and ISO 21930:2007	SCS-EPD-03589	

Warranty

A 5-year limited commercial warranty is available when installed per Dinoflex's installation guidelines.



"We believe when we help our customers succeed, we succeed."

Technical Data Sheet



Testing

Description	Test Method	High Impact Backing	WalkSoft Backing
Anti-Fatigue Compression Deflection Comparison			20 lbs/square inch. Deflection: 0.036 inch 40 lbs/square inch. Deflection: 0.056 inch
Static Propensity	AATCC 134		Maximum Average Voltage = POS 0.7 KV
Compression Set @ 25%		-7.60%	
Breaking Load / Elongation / Tensile	ASTM D412	Breaking Load: 87.80 lbs Elongation: 138.65% Tensile: 501.7 lbs/sq inch	Breaking Load: 50.18 lbs Elongation: 214.77% Tensile: 354.6 lbs/sq. inch
Static Coefficient of Friction	ASTM D2047	Dry: 0.97	Dry: 0.97
Density	ASTM D3676		53.8 lbs/ft ³
Abrasion Resistance	ASTM D4060	Weight Loss: 0.56 grams (0.86%)	Weight Loss: 0.56 grams (0.86%)
Sound Transmission	ASTM E492		IIC: 60
Critical Radiant Flux (with fire retardant)	ASTM E648	0.52 watts/square cm	
Flexibility	ASTM F137	Passes 6 mm Mandrel	Passes 15 mm Mandrel
Electrical Resistance (Surface to Ground)	ASTM F150		5.3 x 10 ⁹ Ohms (average)
Electrical Resistance (Surface to Surface)	ASTM F150		1.9 x 10 ¹⁰ Ohms (average)
Chemical Resistance (5 min)	ASTM F925		Slight Change to 5% Phenol
Chemical Resistance (24-hour)	ASTM F925		Slight Change to 5% Phenol
Static Load (@ 250 lbs)	ASTM F970	Residual Compression: 0.001 inch	Residual Compression: 0.002 inch
Short Term and Residual Indentation (@ 140 lbs)	ASTM F1914	-0.012 inch (3.74%)	-0.005 inch (1.87%)
Vertical Rebound	ASTM F2117		88%



“We believe when we help our customers succeed, we succeed.”