



Comfort Cushion UNDERLAYMENT by dinoflex

Superior **Sound** and Noise **Absorption**


COMMERCIAL ■ RETAIL ■ RESIDENTIAL ■ MULTI-FAMILY



RECYCLED
RUBBER
FLOORING

Dinoflex Comfort Cushion Underlayment is a superior acoustic product designed to deliver sound dampening between occupied floors at a fraction of the cost of alternate materials or expensive sound engineered systems. Made from Re grind - our post-industrial waste material, our underlayment is certified to meet the stringent FloorScore® specifications for low VOC and ultra low odor.

Dinoflex Comfort Cushion Underlayment is versatile, it can be installed under floating, taped, glued and most double-stick floor coverings as well as over a variety of substrates. It is a natural choice for commercial, industrial, and residential flooring projects.

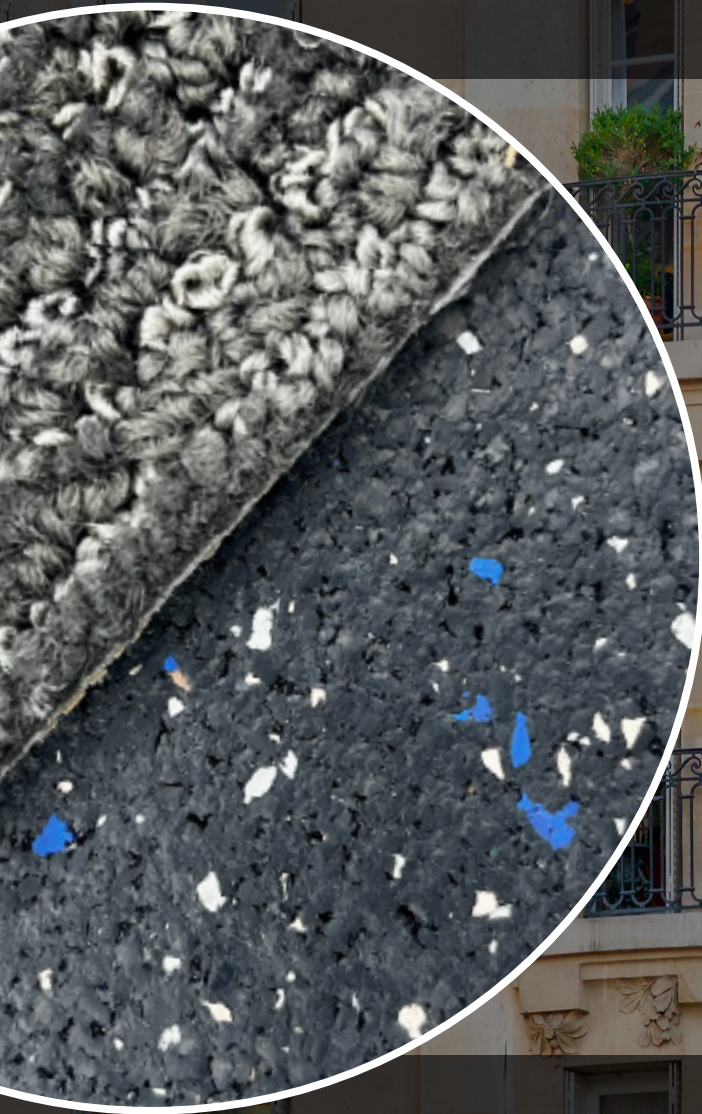

Peace And Quiet For You
And The Neighbors.

Features

- Superior sound absorption
- Ergonomic benefits
- Ultra-low odor
- Compression resistant
- Easy to install
- Consistent thickness and density edge to edge
- Economical
- Crack Suppression Membrane

Benefits


- Reduce the passage of impact transmission noise.
- Provides increased underfoot cushioning
- Low VOC and FloorScore® certified
- Will not pack out like foam or fabric underlay while under heavy traffic or heavy furniture loads.
- No gluing, taping or special tools required.
- Goes down consistent without the spongy or bouncy feeling under foot.
- Cover more square footage for less money
- Suitable for cracks up to 1/4"

Best For

Commercial
Education
Fitness

Healthcare
Hospitality
Multi-Family

Retail
Residential

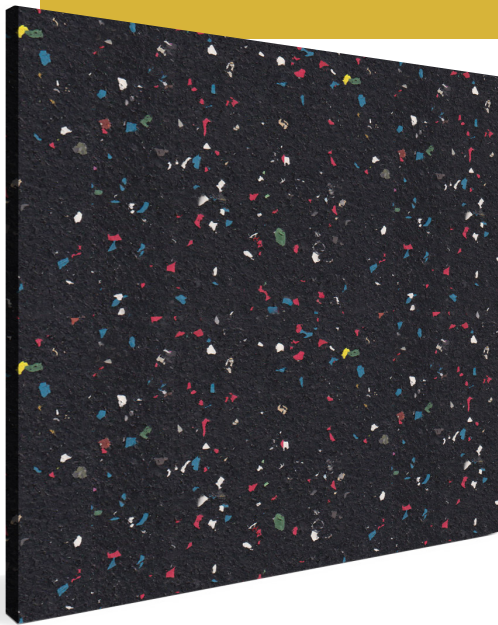

Regrind material, color varies

Tolerance of +/- 0.5mm


Uncut Edge

49.5" x 73.5" = 25.27 ft²
(125.73cm x 186.69cm)

STANDARD THICKNESS

3mm (1/8")
5mm (3/16")
6mm (1/4")

Note: Custom thickness
available

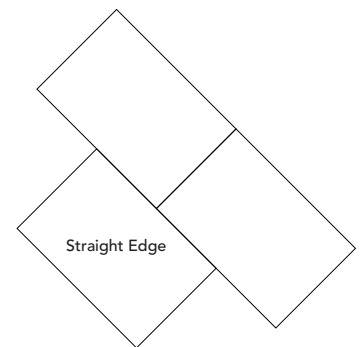

For Technical Data, please go to <https://dinoflex.com/products/comfort-cushion-underlayment>

Uncut Edges: This product is not waterjet cut and comes with unfinished edges which may not be square.



Comfort Cushion

UNDERLAYMENT

by dinoflex

Testing Results

DESCRIPTION	TEST METHOD	RESULTS
Impact Sound Transmission Test (IIC/ Delta)	ASTM E2179	(3mm) IIC 47, Delta 19 (5mm) IIC 49, Delta 21
Static Coefficient of Friction	ASTM D2047	Dry 0.85; Wet 1.01

Please Note: All measurements are subject to nominal variation.

Dinoflex
P.O. Box 3309
5590 46 Ave SE
Salmon Arm, BC, Canada
V1E 4S1

Toll Free: 1-877-713-1899
Direct: 250-832-7780
sales@dinoflex.com
dinoflex.com

5-year Limited Warranty
when installed in accordance with
Dinoflex's Installation Guidelines.



Date Issued: September 2025