



Nature's Collection

by dinoflex

Naturally **Elegant.**
Naturally **Beautiful.**

RETAIL ■ HOSPITALITY ■ COMMERCIAL ■ EDUCATION



RECYCLED
RUBBER
FLOORING

Sophisticated and elegant, Nature's Collection blends the durability and versatility of recycled rubber with the style of sustainably harvested cork. By infusing cork granules we add depth and texture to the surface, while the vivid colors of the EPDM offer contrast, coming together for a perfectly balanced design that is sure to leave you impressed.



Made for
Designers.

We have combined characteristics that are similar yet complementary to one another, giving you a product with superb performance and a visual dimension not typically found with rubber surfaces.

Features

- Sustainably harvested cork granules
- Aesthetically versatile
- Increased insulation properties
- Durable
- Ergonomic benefits
- Natural resistance to mold and mildew
- Sound absorbing
- High traction

Benefits


- Renewable source which does not harm the planet
- Design a space that is uniquely different
- Spaces will hold heat and remain warm
- Resists abrasions and indentations, resulting in a long-life expectancy
- Provides relief to a person who stands for long periods of time
- Great for high moisture environment areas
- Increased acoustic properties over other resilient products
- Eliminates the need for non-slip matting

Best For

Commercial
Hospitality

Lobbies
Multi-use Facilities

Office Spaces
Retail

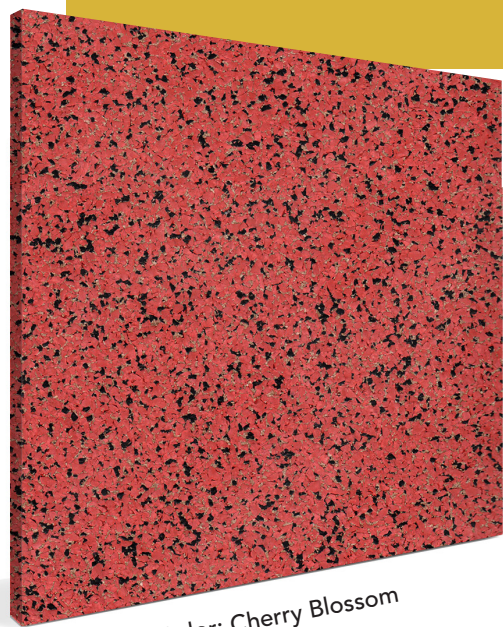

Color: Cherry Blossom

Tolerance of +/- 0.5mm

Square Cut Glue Down

38" x 38" = 10.0ft²
(96.5cm x 96.5cm = 0.93m²)

STANDARD THICKNESS

4mm (5/32")

5mm (3/16")

6mm (1/4")

7mm (9/32")

8mm (5/16")



Interlocking Loose Lay

37" x 37" = 9.5ft²
(94cm x 94cm = 0.88m²)

STANDARD THICKNESS

7mm (9/32")

8mm (5/16")




Nature's Collection is not recommended for commercial fitness facilities.
For Technical Data, please go to <https://dinoflex.com/products/natures-collection>

Color Swatches


Nature's Collection

by dinoflex

LEVEL 1




ANDARA



BLUE APATITE




COFFEE BEAN




FIRE OPAL




HEMATITE



HOWLITE



LAZURITE




LEPIDOLITE

LEVEL 2




MOON SHADOW




SUGILITE




ASHES




CANYON




CARRIBEAN



FOSSIL




STONE




BARK


LEVEL 4




BLUE BELLS




IRIS




OCEAN




ORCHID




PINE TREE




SAPPHIRE




CHERRY
BLOSSOM




DAFFODIL




LAVENDER




MEADOW GRASS




MONARCH




MOSS




PASSION FLOWER



STARRY NIGHT



WATERFALL



WILLOW TREE

Contact your Sales Representative for more information.

Colors shown are reproduced as closely as possible to actual product. Contact Dinoflex for product sample.

This product must be coated with DinoGuard 2.0.

**the color
innovator**

[Click here to design your own
Recycled Rubber color.](#)



Testing Results

DESCRIPTION	TEST METHOD	RESULT
Sound Absorption / Noise Reduction Coefficient	ASTM C423-09A	6mm 0.04
Taber Abrasion	ASTM C501	1.39% Weight Loss
Compression Set Under Force	ASTM D395B	82.2% Recovered
Breaking Load and Elongation	ASTM D412	Tensile - 204.4 lbs/sq. in.
Static Coefficient of Friction	ASTM D2047	Dry 0.78
Hardness Shore A Durometer	ASTM D2240	65 Indentation
Material Emissions VOC	ASTM D5116	Pass
Impact Sound Transmission	ASTM E492	6mm IIC 58
Critical Radiant Flux	ASTM E648	0.39 watts/sqaure cm (Class II)
Flexibility	ASTM F137-03	6mm Mandrel PASS
Electrical Resistance - Surface to Ground	ASTM F150	4.0 x 10 ¹⁰ ohms (average)
Electrical Resistance - Surface to Surface	ASTM F150	2.8 x 10 ¹¹ ohms (average)
Resistance to Chemicals (5 min & 24 hr)	ASTM F925	Slight to Moderate Color Change from 5% Acetic Acid, Mineral Oil, 5% Phenol, Kerosene and Olive Oil
Static Load (1000 lbs)	ASTM F970-87	0.009 inch residual compression
Short Term Indentation (140 lbs)	ASTM F1914-98	-0.064 inch residual indentation

Please Note: All measurements are subject to nominal variation.

Dinoflex
P.O. Box 3309
5590 46 Ave SE
Salmon Arm, BC, Canada
V1E 4S1

Toll Free: 1-877-713-1899
Direct: 250-832-7780
sales@dinoflex.com
dinoflex.com



10-year limited warranty
when installed in accordance with
Dinoflex's Installation Guidelines.

Date Issued: September 2025