

The logo for Next Step WALKSOFT by dinoflex. It features a stylized yellow and white window icon to the left of the text "Next Step® WALKSOFT" in a large, bold, sans-serif font. Below "WALKSOFT" is the text "by dinoflex" in a smaller, lighter font.

Next Step® WALKSOFT by dinoflex


The Prescription for Comfort

DENTAL ■ COMMERCIAL ■ RETAIL ■ HEALTH CARE



RECYCLED
RUBBER
FLOORING

When aesthetics and ergonomics both come first, we recommend NEXT STEP® WalkSoft recycled rubber flooring. Choose from custom or curated colors to suit your design and we'll create a single ergonomic surface with our WalkSoft backing for the ultimate underfoot comfort and support. With NEXT STEP® WalkSoft, you'll enjoy the look AND feel of your floor for years to come.

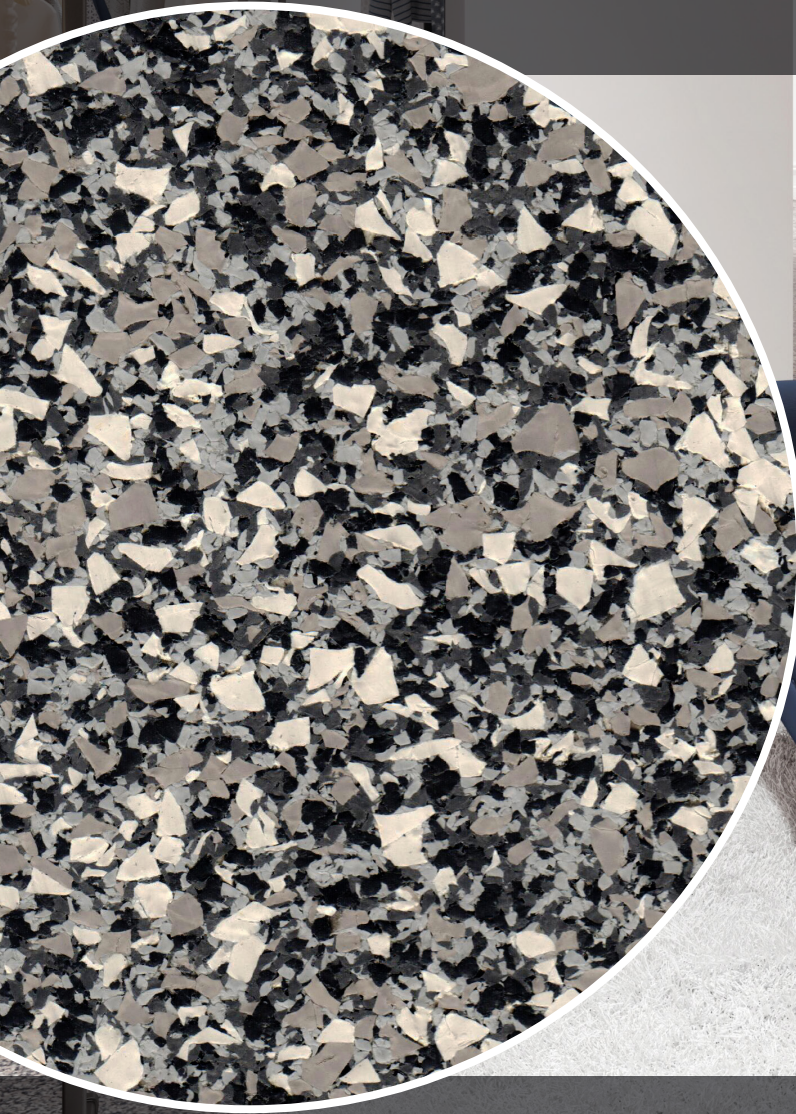

Created for
Underfoot
Comfort.

This series offers a softer, more comfortable feel while still giving users the durability and easy maintenance that makes recycled rubber flooring so versatile and long lasting. NEXT STEP® WalkSoft reduces stress on backs, knees, hips, ankles, and joints, reducing costly health claims.

Features

- Superior ergonomic qualities
- High traction
- Stain resistant
- Easy cleaning
- Sound reducing
- High level of recycled content
- High density top layer
- Unlimited color selection

Benefits


- Offers anti-fatigue underfoot comfort
- Reduced fall consequences
- Prevents unsightly stains that affect your environment
- Results in low maintenance saving money and time
- Lowers undue noise and increases space enjoyment
- Utilizing recycled content reduces the overall costs
- Long product life
- WalkSoft backing can be applied to any Dinoflex color

Best For

Commercial Banking
Commercial Retail
Dental

Hospitality
Laboratory Workstations
Nursing

Physiotherapy
Spa

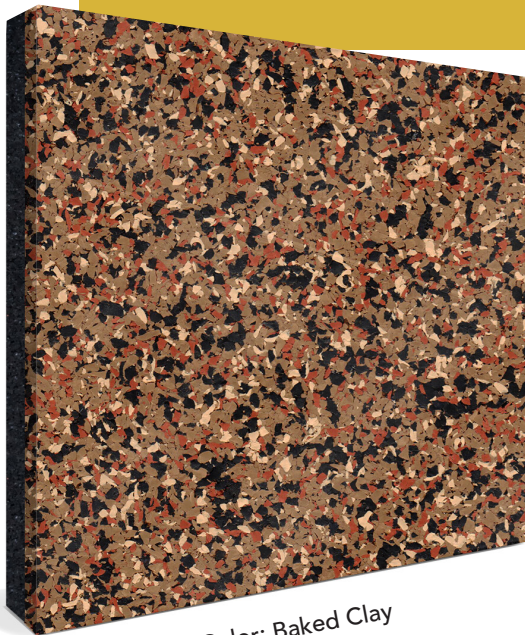

Color: Baked Clay

Tolerance of +/- 0.5mm

Color selections are available
from Sport Mat, Evolution &
Nature's Collection



Square Cut Glue Down

38" x 38" = 10.0ft²
(96.5cm x 96.5cm = 0.93m²)

Interlocking Loose Lay

37" x 37" = 9.5ft²
(94cm x 94cm = 0.88m²)



STANDARD THICKNESS

8mm – 5/16" (4mm top surface with 4mm recycled black backing)

10mm – 3/8" (4mm top surface with 6mm recycled black backing)

12mm - 1/2" (4mm top surface with 8mm recycled black backing)

** Custom thicknesses are available*



[Click here to design your own Recycled Rubber Color.](#)

DESCRIPTION	TEST METHOD	RESULTS
Anti-Fatigue Compression Deflection Comparison		3+ 5mm 75% EPDM @ 20 lbs/sq in. deflection 0.036 Inch; @ 40 lbs/sq. in. deflection 0.047 Inch 3+12mm 75% EPDM @ 20 lbs/sq in. deflection -0.050 Inch; @ 40 lbs/sq. in. deflection -0.065 Inch 4+ 4mm 75% EPDM @ 20 lbs/sq in. deflection 0.041 Inch; @ 40 lbs/sq. in. deflection 0.054 Inch 4+ 6mm 75% EPDM @ 20 lbs/sq in. deflection 0.029 Inch; @ 40 lbs/sq. in. deflection 0.043 Inch 4+ 8mm 75% EPDM @ 20 lbs/sq in. deflection 0.027 Inch; @ 40 lbs/sq. in. deflection 0.042 Inch
Abrasion Resistance 1,000 grams @ 1,000 cycles	ASTM C501	Weight Loss 2.85 grams (4.0%)
Compression Set	ASTM D395B	96.7% Recovered; 3.3% Unrecovered
Breaking Load / Elongation / Tenacity	ASTM D412	Breaking Load: 64.3 lbs Elongation: 115.2% Tenacity: 198.9 lbs/Square Inch
Static Coefficient of Friction	ASTM D2047	Dry 0.85; Wet 1.01
Hardness Shore A Durometer	ASTM D2240	68
Density	ASTM D3676	63.5 lbs/ft ³
Abrasion Resistance	ASTM D4060	3+5mm 75% EPDM - Weight Loss = 0.45 Grams 4+4mm 75% EPDM - Weight Loss = 0.49 Grams
Surface Friction	ASTM E303	Dry 106.0 BPN Wet 103.0 BPN
Critical Radiant Flux	ASTM E648	CRF 0.19 watts/square cm (4mm 70% EPDM) CRF 0.23 watts/square cm (4mm 80% EPDM) CRF 0.25 watts/square cm (6mm 80% EPDM) CRF 0.22 watts/square cm (10mm 80% EPDM)
Critical Radiant Flux - With Fire Retardant	ASTM E648	CRF 0.20 watts/square cm (8mm - 40% Fire Retardant/60% SBR) CRF 0.37 watts/square cm (10mm - 40% Fire Retardant/60% SBR)
Critical Radiant Flux (15 min burn)	ASTM E648 (NY)	CRF 0.59 watts/square cm (4mm 70% EPDM) CRF 0.58 watts/square cm (4mm 80% EPDM) CRF 0.84 watts/square cm (6mm 80% EPDM) CRF 0.61 watts/square cm (10mm 80% EPDM)
Smoke Density	ASTM E662	Flaming 462; Non-Flaming 396
Electrical Resistance - Surface to Ground	ASTM F150	1.9x10 ¹¹ Ohms
Electrical Resistance - Surface to Surface	ASTM F150	3.9x10 ¹¹ Ohms
Resistance to Puncture	ASTM F924	3+5mm 75% EPDM - Drop height exceeds 36 inches with no penetration
Chemical Resistance	ASTM F925	No Change
Static Load (250 lbs)	ASTM F970	0.008 inch residual compression
Fall Height	ASTM F1292	4+10 mm 75% EPDM - 14" fall height
Short Term and Residual Indentation	ASTM F1914	4+4mm 75% EPDM - Immediate @ 50 lbs = -0.017 Inch - Residual @ 50 lbs = -0.007 Inch
Mildew Resistance	ASTM G21	No Mildew After 28 Days

Dinoflex
 P.O. Box 3309
 5590 46 Ave SE
 Salmon Arm, BC, Canada
 V1E 4S1

Toll Free: 1-877-713-1899
 Direct: 250-832-7780
sales@dinoflex.com
dinoflex.com

Please Note: All measurements are subject to nominal variation.

5-year limited warranty
 when installed in accordance with Dinoflex's
 Installation Guidelines.

Date Issued: September 2025

