

# PlayTiles<sup>®</sup>

by dinoflex


Let **Kids** be **Kids**

SCHOOLS ■ PARKS ■ PLAYGROUNDS ■ DAYCARES



RECYCLED  
RUBBER  
FLOORING





**Dinoflex PlayTiles®** creates a safe place to let kids be kids. Parents will have peace of mind knowing their kids are playing on an ASTM certified surface. Specially designed to reduce injuries from falls, kids can run, jump, swing, and slide on a product that supports play.

Water  
Permeable  
and Slip  
Resistant.

Tough enough to stand up to any weather condition and the most active children, PlayTiles® allow your kids to play on a dry surface after a rainstorm, getting them back outside quickly.



## Features

- Fall height certified
- High traction
- Water permeable
- Molded tile creates solid surface
- Easy to install
- Long lasting
- Meets ADA standards

## Benefits

- Reduces injuries from falls
- Slip resistant even when wet
- Porous in nature, allows water to flow through
- No adhesive required for most applications
- Tiles can be installed in any season
- Withstands any wear and tear
- Creates an inclusive play space for all

## Best For

Climbing Walls


Community Centers

Daycares

Indoor Play Areas

Recreation Centers

Schools

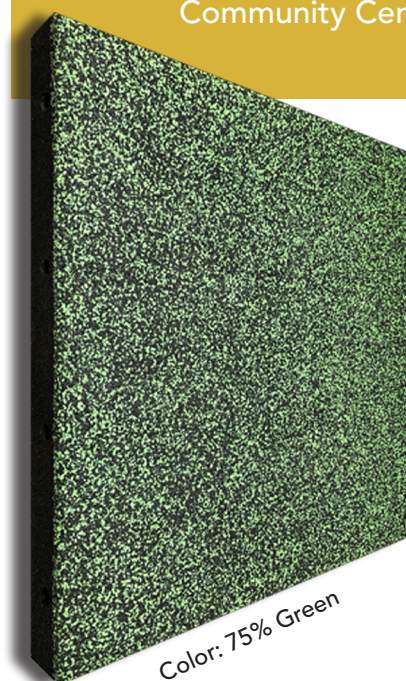

## Interlocking Tile

24" x 24" | 4ft<sup>2</sup>

(61cm x 61cm = 0.37m<sup>2</sup>)


THICKNESS	FALL HEIGHT	With 1 1/4" Dinofall System	With 2 1/4" Dinofall System
1 1/2" (38mm)	4' (1.2m)	7' 6"	11' 6"
2 1/4" (57mm)	6' (1.8m)	9'	12'

## Interlocking System


Dinoflex self-aligning interlocking system provides for a fast and accurate installation. Interlocking tubes are included with every order for a nominal cost.



Interlock Tube



Interlocking Panels

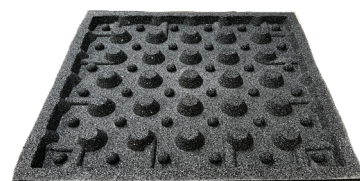

Tile Back

# Accessories

## Ramps and Wedges



1.5" Wedge




2.25" Wedge



Inside Corner



Outside Corner



1.5" ADA Wheelchair Ramp



2.25" Wheelchair Ramp  
(Sold as a set)

## Dinofall System


Increase fall height protection by using our Dinofall System made from 100%, recycled, non-contaminated, post industrial cross-linked closed cell polyethylene.

### Dinofall Dimensions

THICKNESS	SHEET	
1 1/4" and 2 1/4"	39 1/16" x 90 9/16"	Tolerance +/- 1/16"
31.75mm and 57.15mm	99.21cm x 230.02mm	Tolerance +/- 0.06mm



Tile




Dinofall



Tile and Dinofall

# Color Swatches



BLUE EMBER



FOREST GREEN



STONE BEIGE



TEAK BROWN




TERRA COTTA  
RED




BLACK

## EPDM Variations



25% BLUE



25% GREEN




25% BEIGE




25% BROWN




25% RED



25% ORANGE




50% BLUE



50% GREEN



50% BEIGE




50% BROWN



50% RED




50% ORANGE




75% BLUE




75% GREEN




75% BEIGE



75% BROWN



75% RED



75% ORANGE

Contact your Sales Representative for more information.  
Colors shown are reproduced as closely as possible to actual product.  
Contact Dinoflex for product sample.



[Click here to design your own  
Recycled Rubber Tile.](#)





DESCRIPTION	TEST METHOD	RESULT
Freeze Thaw	ASTM C67	No Change
Slip Coefficient	ASTM C1028	Dry: 0.81 Wet: 0.73
Rubber Deterioration in an Air Oven	ASTM D573	No change
Critical Radiant Flux	ASTM E648	CRF 0.10 watts/square cm (2¼" - Black)
Critical Radiant Flux - With Fire Retardant	ASTM E648	CRF 1.04 watts/square cm (1½" Black 100% Fire Retardant) CRF 0.84 watts/square cm (1½" Black 60% Fire Retardant) CRF 0.99 watts/square cm (1½" Black with Fire Retardant top) CRF 0.95 watts/square cm (2¼" Black with Fire Retardant)
Critical Radiant Flux - With Fire Retardant (15 min burn)	ASTM E648 (NY)	CRF 1.04 watts/square cm (1½" Black 100% Fire Retardant) CRF 1.04 watts/square cm (1½" Black 60% Fire Retardant) CRF 0.99 watts/square cm (1½" Black with Fire Retardant top) CRF 0.97 watts/square cm (2¼" Black 100% Fire Retardant whole tile) CRF 0.97 watts/square cm (2¼" Black with Fire Retardant)
Fall Height	ASTM F1292	1½" - 4 ft 2¼" - 6 ft
Fall Height (with 1½" Dinofall system)	ASTM F1292	1½" - 7.5 ft 2¼" - 9 ft
Fall Height (with 2¼" Dinofall system)	ASTM F1292	1½" - 11.5 ft 2¼" - 12 ft
Mildew Resistance	ASTM G21	21 days - light mold growth 28 days - moderate mold growth
Water Drainage		4 litres drained in 306.71 seconds (5.1 minutes)
Wind Resistance	UL 1897	Pass

Please Note: All measurements are subject to nominal variation.

Dinoflex  
P.O. Box 3309  
5590 46 Ave SE  
Salmon Arm, BC, Canada  
V1E 4S1

Toll Free: 1-877-713-1899  
Direct: 250-832-7780  
[sales@dinoflex.com](mailto:sales@dinoflex.com)  
[dinoflex.com](http://dinoflex.com)



**10-year limited warranty**  
when installed in accordance with  
Dinoflex's Installation Guidelines.

Date Issued: September 2025